


Checklist for Abrasive Wheel Equipment - Grinders

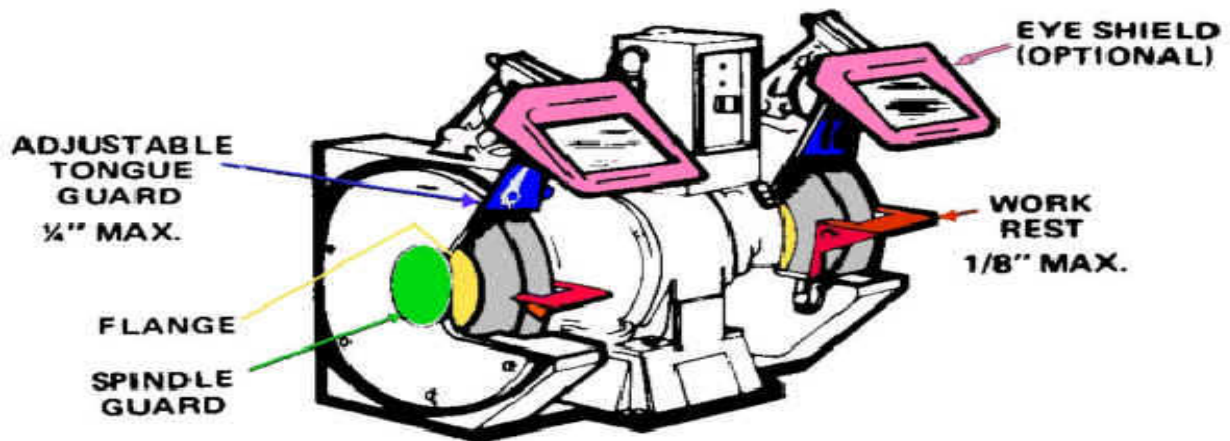

Standard 29 CFR 1910	Description	YES	NO
215(a)(2)	Do side guards cover the spindle, nut and flange and 75% of the wheel diameter?		
215(a)(4)	Is the work rest used and kept adjusted to within 1/8-inch (0.3175cm) of the wheel?		
215(b)(9)	Is the adjustable tongue guard on the top side of the grinder used and kept to within 1/4-inch (0.6350cm) of the wheel?		
215(d)(1)	Is the maximum revolutions per minute (RPM) rating of each abrasive wheel compatible with the RPM rating of the grinder motor?		
215(d)(1)	Before new abrasive wheels are mounted, are they visually inspected and ring tested?		

**Contact Your CompWest Loss Control Consultant
If You Have Any Questions or Need Assistance**